

ENERVEX® EFV 400 EXHAUST FAN

020.1233.0524 05.24

Product Information

Use

The EFV exhaust fan is designed to provide movement of air in exhaust systems. Suitable applications include exhaust in kitchens/bathrooms/laundries in multi-story, multi-family buildings. The fan is designed to exhaust lint-laden air from single or multiple Type I and Type II residential and commercial clothes dryers. It is for outdoor insulation use only.

Description

The fan housing is hinged and the top can be opened for easy service and access to the duct. The fan ensures a negative pressure in the entire duct system. The fan is installed at the duct termination point and can be mounted vertically or side-wall vented. Discharge is vertical (horizontal, if side-wall vented). The EFV fan is for use in systems where exhaust temperatures do not exceed 350°F (177°C).

Material

The fan housing is 3/16" cast aluminum. One coat of black hammer paint is applied for added corrosion resistance.

The backwards curved impeller is made of aluminum. The impeller is dynamically and statically balanced with permanently attached zinc balancing weights.

Motor

The IE5 rated motor is a TEFC, maintenance-free variable speed permanent magnet motor with pre-lubricated and sealed ball bearings and a Class H temperature rating. The motor with controller is rated at 92% efficiency and able to operate as low as 50 RPM. It has integrated protection against overloading, blocking over and under voltage and over-heating. The motor shaft is internally isolated to eliminate the need for external shaft grounding. It is rated for outdoor installation.

Standard Equipment

- 2"x4" or 4"x4" junction box with cover and conduit
- Bird Screen
- EDrive motor controller

Optional Equipment

- MEC 24 Modulating Exhaust Control

Listings



ENERVEX certifies that the EFV 250 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 AMCA Publication 301 and comply with the requirements of the AMCA Certified Ratings Program.



The EFV 400 Exhaust Fan is ETL Listed in the U.S. and Canada under file no. 514733:

- UL 705 Standard for Power Ventilators
- CSA-CAN-B255-M81 Mechanical Flue Gas Exhausters

Complies with and meets Type B, Spark Resistant Construction per AMCA Standard 99-0401 Classifications of Spark Resistant Construction.

Warranty

- 2-Year Factory Warranty on entire fan
- 10-Year Warranty Against Corrosion Perforation

Complete warranty conditions are available from ENERVEX Inc.

ENERVEX Inc.
1685 Bluegrass Lakes Parkway
Alpharetta, GA 30004
USA

P: 770.587.3238
F: 770.587.4731
T: 800.255.2923
info@enervex.com
www.enervex.com

ENERVEX®
VENTING DESIGN SOLUTIONS


ENERVEX® EFV 400 EXHAUST FAN

020.1233.0524 05.24

Product Information


Specifications

Model	EFV 400-EC	
Fan Type	Centrifugal Impeller (BC-Wheel)	
Motor Type	ECM, Permanent Magnet	
Voltage Configuration	3x208-240 VAC	3x380-480 VAC
Edrive Model	321.2310.2200	321.2310.4200
Edrive Ratings		
NEMA / IP Rating	4X / IP66	
Supply Voltage - VAC	3 x 208-240	3 x 380-480
Power - kW	1,5	
Max Input Current - Amp	8,9	5,6
Max Output Current - Amp	7	4,1
Min Operating Temp. - °F / °C	-4 / -20	
Max Operating Temp. - °F / °C	104 / 40	
Motor Rating		
Motor Efficiency Class	I E 5	
Temperature Class	H	
NEMA / IP Rating	3S / IP54	
Max Current - Amp	6,5	3,7
Max Speed - RPM	3000	
Power - kW / HP	1.5/2	
Torque - Nm	5,7	
Motor Operating Settings		
Fan Speed - RPM	1720	
Max Power - kW / HP	1.05/1.41	
Max Torque - Nm	5,83	
Weight		
EFV - lbs / kg	111/50	
EDrive - lbs /kg	7.7/3.5	5.5/2.5

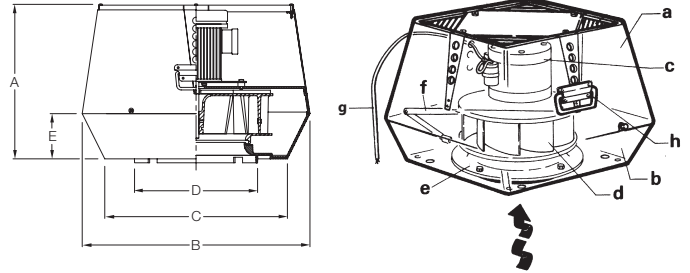

- a Top Section
- b Bottom Section
- c Motor
- d Centrifugal Impeller
- e Inlet for Impeller
- f Locking Hinge
- g Bird Screen
- h Carrying Handle
- i Wiring Conduit

Capacity

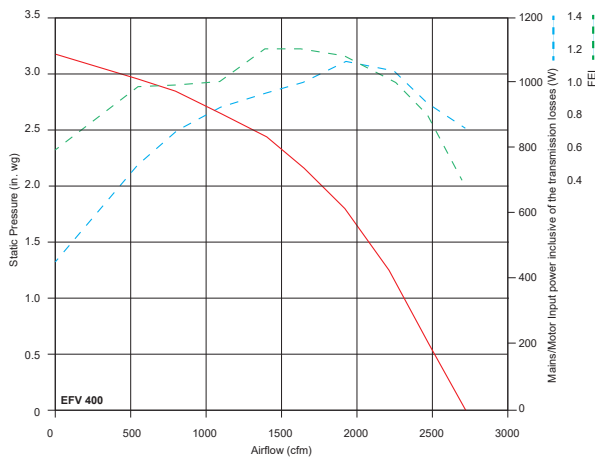

Sound Diagram

SP	Sound Power re 10 ⁻¹² Watts								Sones	L _{wc} A
	Octave Bands									
	1	2	3	4	5	6	7	8		
0.103	77	78	93	84	86	84	73	66	28.0	91
1.574	74	77	90	82	83	78	71	66	23.0	87
2.659	77	79	87	79	80	76	71	65	21.0	84
2.941	77	85	88	81	81	76	71	65	22.0	85

Values shown are for outlet L_{wc}A sound power levels for Installation Type C: ducted inlet, free outlet. The sound power level ratings shown are in decibels, referred to 10-12 watts, calculated per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. The sound ratings shown are loudness values in fan sones at a distance of 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for free outlet hemispherical sone levels. dBA levels are not licensed by AMCA International.

Specifications are subject to change without notice.

ENERVEX Inc.
1685 Bluegrass Lakes Parkway
Alpharetta, GA 30004
USA

P: 770.587.3238
F: 770.587.4731
T: 800.255.2923
info@enervex.com
www.enervex.com

ENERVEX®
VENTING DESIGN SOLUTIONS